


Stainless Steel Washtough (SGL Panels)

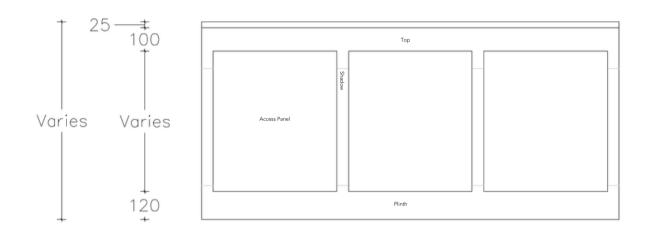

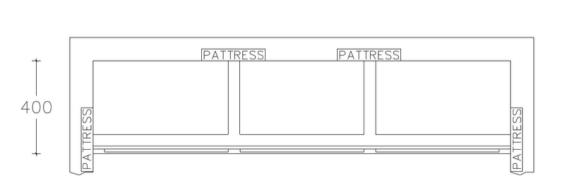



Call: 01692 774920 | Email: info@cube-install.com

Belmore Place, 6 Bunkell Road, Rackheath Ind Estate, Norwich, NR13 6PX





DIMENSIONS

Standard Heights

- 600mm - 900mm

Standard Depths

- 400mm

TECHNICAL DETAILS

Access Panel

Material

- Solid Grade Laminate

Edge Treatment

- Polished and radiused

Thickness

- 13mm

Component Types

- Fixing clips with pull-out facility

- Fixing clips with lift-off facility

- Hinges for fixed position, openable access panels

- Turn locks for hinged panels

- Security fixings for clip fixed panels

Dimensions

- Width and Height to suit site dimensions and panel application

Shadow Panel

Material

- Solid Grade Laminate

Edge Treatment

- Straight Cut

Thickness

- 13mm

Components

- High strength fixing into framework

TECHNICAL DETAILS

Plinth

Material

- Solid Grade Laminate

Edge Treatment

- Straight Cut

Thickness

- 13mm

Components

- High strength fixing into framework

Framing

Material

- Soft wood for bespoke fitting to surroundings

Components

- Receiving pull-out clips

- Receiving lift-off clips

- High strength fixing into pattress or solid wall/floor

Site Erected

- To take covered flooring or fix on pre-installed floor

- Top shadow to be minimum 50mm where lift off systems is being used

Top

Material

- Grade 304 Austenitic Stainless Steel

Edge Treatment

- Welded

Downstand

- 25mm Upstand

- 40mm

Waste Detail

- Gradual fall to central waste hole