
**Ridge** Your long-lasting choice for toilets, showers and changing rooms.

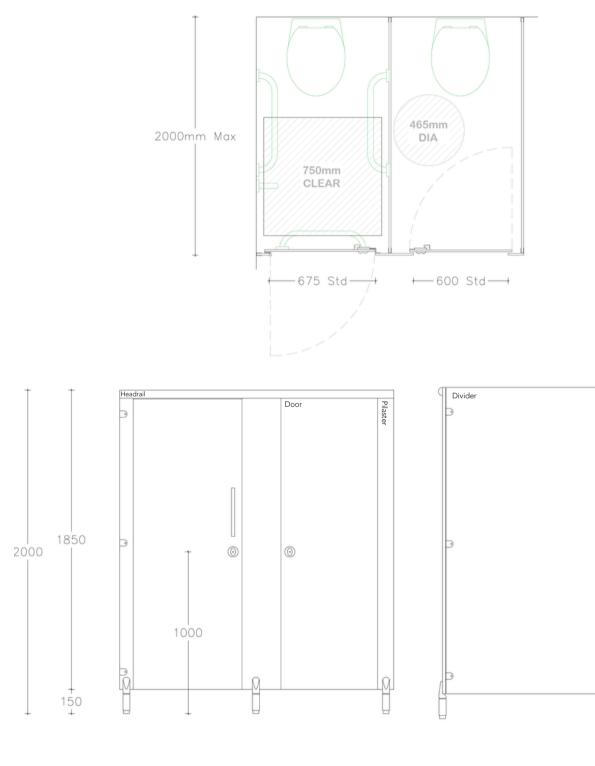

Cert No. 15847

ISO 9001

ISO 45001

Call: 01692 774920 | Email: info@cube-install.com Cube Install Limited Belmore Place, 6 Bunkell Road, Rackheath Ind Estate, Norwich, NR13 6PX www.cube-install.com Registered in England No. 10501718



#### DIMENSIONS

Max Overall Height - 2000mm Max Depth - 2000mm Floor Clearance - 150mm

### **TECHNICAL DETAILS**

### **Door Panel**

- Material
- Solid Grade Laminate
- Edge Treatment
- Polished and radiused
- Thickness
- 13mm
- Standard Dimensions
- Inward Opening H 1850mm x W 650mm, 25mm overlap with pilaster either side.
- Outward Opening H 1850mm x W 700mm, 25mm overlap with pilaster either side
- Size to suit site requirements and relevant building regulations
- Components
- Indicator Face Plate
- Indicator Slide Bolt
- Coat Hook
- Self Closing Hinges

# **Pilaster Panel**

- Material
- Solid Grade Laminate
- Edge Treatment
- Polished and radiused
- Thickness
- 13mm
- Standard Dimensions
- H 1850mm x W 1500 varies to suit site dimensions
- Components
- Pedestal
- Indicator Slide Bolt Keep
- Headrail
- Fixing Cleat

### **TECHNICAL DETAILS**

### Divisions

- Material
- Solid Grade Laminate
- Edge Treatment - Polished and radiused
- Polished and radiuse Thickness
- 13mm
- Standard Dimensions
- H 1850mm x W 1500mm varies to suit site dimensions. Dimensions from back of cubicle to front
- Components
- Fixing Cleat

# Hardware

- Indicator Plate
- Satin Anodised Aluminium
- Emergency release facility
- Circular face plate
- Concealed fixings
- Red/White occupancy indicator
- Face Fixed

Indicator Bolt

- Satin Anodised Aluminium
- Easy slide action lock
- Integrated buffer
- Face Fixed
- Keep
- Satin Anodised Aluminium
- Face Fixed
- Hinge
- Satin Anodised Aluminium
- Self closing cams
- Breakout-resistant fixing sleeve
- Anti-finger trap
- Lift-off facility for emergency access Cleat
- Satin Anodised Aluminium
- D brackets
- Stainless Steel bolt-through fixings Pedestal
- Satin Anodised Aluminium
- Adjustable height to accommodate
- -- uneven floors
- Giving 150mm floor clearance
- Solid rolled design
- Headrail
- Satin Anodised Aluminium
- High strength D profile