


# Solid Surface Thermofomed Washtrough (HPL Panels)

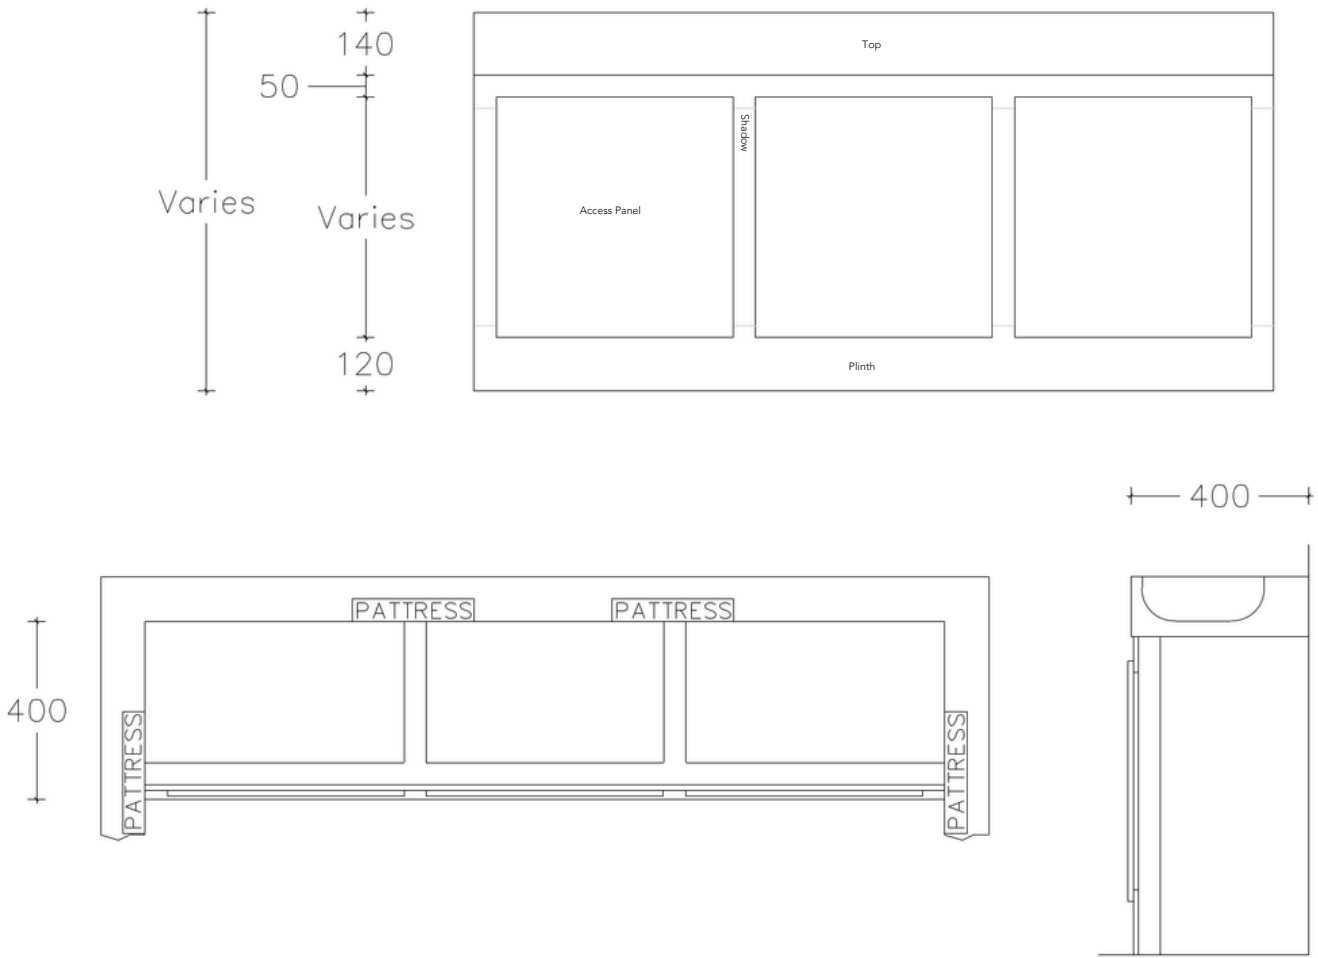

**DIMENSIONS**

- Standard Heights
  - 600mm - 900mm
- Standard Depths
  - 400mm

**TECHNICAL DETAILS**

**Access Panel**

- Material
  - High Pressure Laminate
- Edge Treatment
  - 2mm thick bonded ABS lipping
- Thickness
  - 18mm
- Component Types
  - Fixing clips with pull-out facility
  - Fixing clips with lift-off facility
  - Hinges for fixed position, openable access panels
  - Turn locks for hinged panels
  - Security fixings for clip fixed panels
- Dimensions
  - Width and Height to suit site dimensions and panel application

**Shadow Panel**

- Material
  - High Pressure Laminate
- Edge Treatment
  - Straight Cut
- Thickness
  - 18mm
- Components
  - High strength fixing into framework

**TECHNICAL DETAILS**

**Plinth**

- Material
  - High Pressure Laminate
- Edge Treatment
  - Straight Cut
- Thickness
  - 18mm
- Components
  - High strength fixing into framework

**Framing**

- Material
  - Soft wood for bespoke fitting to surroundings
- Components
  - Receiving pull-out clips
  - Receiving lift-off clips
  - High strength fixing into pattress or solid wall/floor
- Site Erected
  - To take covered flooring or fix on pre-installed floor
  - Top shadow to be minimum 50mm where lift off systems is being used

**Top**

- Material
  - Solid Surface
- Edge Treatment
  - Seamless jointed
- Downstand
  - 140mm
- Upstand
  - Up to 75mm
- Waste Detail
  - Front to back fall to waste slot