


Premium Surface Vanity (SGL Panels)

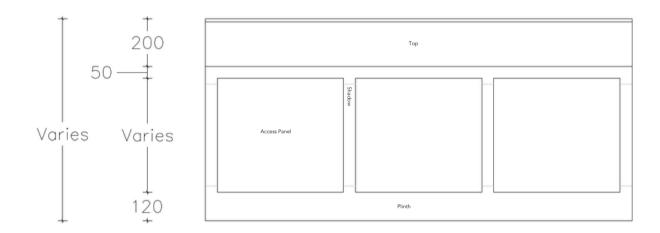

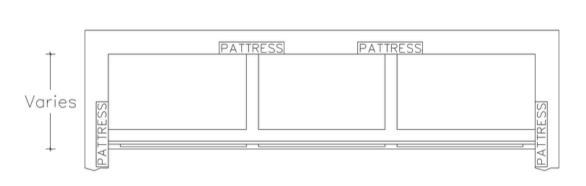



→ Varies →

DIMENSIONS

Standard Heights

- 600mm - 900mm

Standard Depths

- Semi Recessed 350mm
- Fully Recessed 600mm

TECHNICAL DETAILS

Access Panel

Material

- Solid Grade Laminate

Edge Treatment

- Polished and Radiused

Thickness

- 13mm

Component Types

- Fixing clips with pull-out facility
- Fixing clips with lift-off facility
- Hinges for fixed position, openable
- access panels
- Turn locks for hinged panels
- Security fixings for clip fixed panels

Dimensions

- Width and Height to suit site dimensions and panel application

Shadow Panel

Material

- Solid Grade Laminate

Edge Treatment

- Straight Cut

Thickness

- 13mm

Components

- High strength fixing into framework

TECHNICAL DETAILS

Plinth

Material

- Solid Grade Laminate

Edge Treatment

- Straight Cut

Thickness - 13mm

Components - High strength fixing into framework

Framing

Material

- Soft wood for bespoke fitting to surroundings

Components

- Receiving pull-out clips
- Receiving lift-off clips
- High strength fixing into pattress or solid wall/floor

Site Erected

- To take covered flooring or fix on pre-installed floor
- Top shadow to be minimum 50mm where lift off systems is being used

Top

Material

- Material bespoke to your project requirements. Contact us with your requirements.

Edge Treatment

- Butt Jointed

Downstand

- Up to 200mm

Upstand

- Up to 200mm

Call: 01692 774920 | Email: info@cube-install.com

Belmore Place, 6 Bunkell Road, Rackheath Ind Estate, Norwich, NR13 6PX ACCIAIN www.cube-install.com







