



HPL Duct

An ideal aesthetic solution for dry area washrooms.


Ceiling height configuration 1

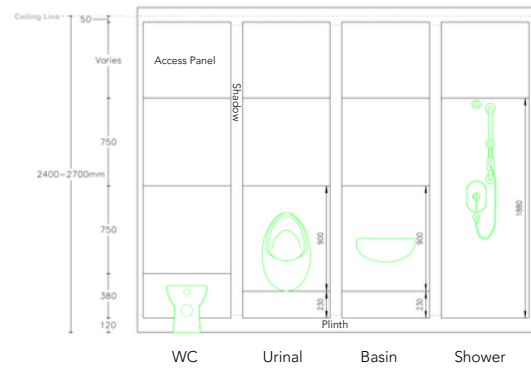


Ceiling height configuration 2

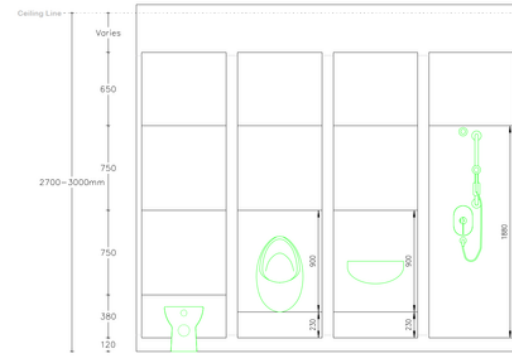


Ceiling height configuration 3

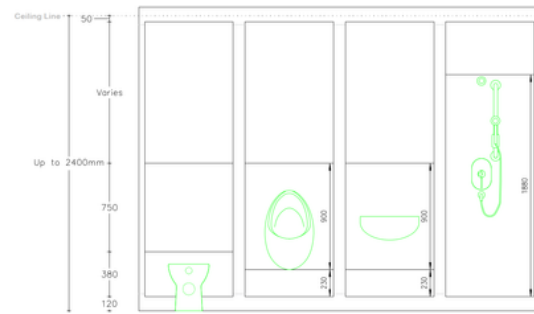

Low level configuration 1

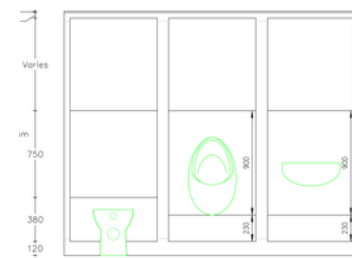

Low level configuration 2

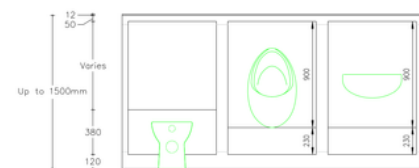

Plan View



DIMENSIONS

Max Overall Height
- 2700mm

TECHNICAL DETAILS

Access Panel

Material
- High Pressure Laminate
Edge Treatment
- 2mm thick bonded ABS lipping
Thickness
- 18mm

Horizontal Panel Joints

- Butt jointed, no gap

Vertical Panel Joints

- Separated by shadow panel
Vertical Panel Joints
- Fixing clips with pull-out facility
- Fixing clips with lift-off facility
- Hinges for fixed position, openable access panels
- Turn locks for hinged panels
- Security fixings for clip fixed panels

Dimensions

- Width and Height to suit site dimensions and panel application

Shadow Panel

Material
- High Pressure Laminate
Edge Treatment
- Straight Cut
Thickness
- 18mm
Components
- High strength fixing into framework

TECHNICAL DETAILS

Plinth

Material
- High Pressure Laminate
Edge Treatment
- Straight Cut
Thickness
- 18mm
Components
- High strength fixing into framework

Framing

Material
- Soft wood for bespoke fitting to surroundings
Components
- Receiving pull-out clips
- Receiving lift-off clips
- High strength fixing into patress or solid wall/floor

Call: 01692 774920 | Email: info@cube-install.com

Cube Install Limited

Belmore Place, 6 Bunkell Road, Rackheath Ind Estate, Norwich, NR13 6PX

www.cube-install.com

Registered in England No. 10501718

