


Solid Surface Thermofomed Washtrough (SGL Panels)

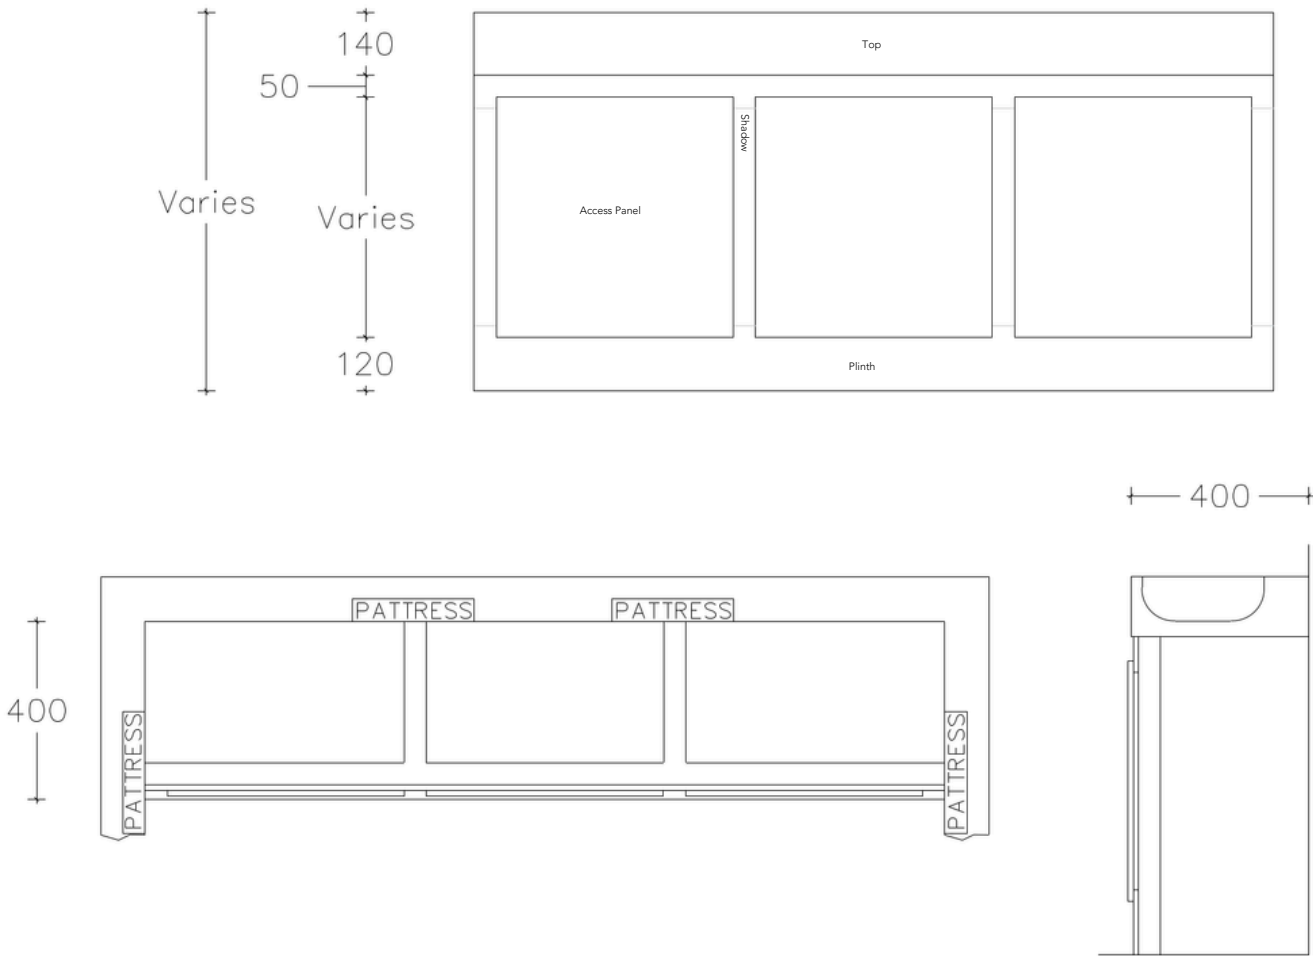

DIMENSIONS

- Standard Heights
 - 600mm - 900mm
- Standard Depths
 - 400mm

TECHNICAL DETAILS

- Access Panel**
- Material
 - Solid Grade Laminate
 - Edge Treatment
 - Polished and radiused
 - Thickness
 - 13mm
 - Component Types
 - Fixing clips with pull-out facility
 - Fixing clips with lift-off facility
 - Hinges for fixed position, openable access panels
 - Turn locks for hinged panels
 - Security fixings for clip fixed panels
 - Dimensions
 - Width and Height to suit site dimensions and panel application

- Shadow Panel**
- Material
 - Solid Grade Laminate
 - Edge Treatment
 - Straight Cut
 - Thickness
 - 13mm
 - Components
 - High strength fixing into framework

TECHNICAL DETAILS

- Plinth**
- Material
 - Solid Grade Laminate
 - Edge Treatment
 - Straight Cut
 - Thickness
 - 13mm
 - Components
 - High strength fixing into framework

- Framing**
- Material
 - Soft wood for bespoke fitting to surroundings
 - Components
 - Receiving pull-out clips
 - Receiving lift-off clips
 - High strength fixing into pattress or solid wall/floor
 - Site Erected
 - To take covered flooring or fix on pre-installed floor
 - Top shadow to be minimum 50mm where lift off systems is being used

- Top**
- Material
 - Solid Surface
 - Edge Treatment
 - Seamless jointed
 - Downstand
 - 140mm
 - Upstand
 - Up to 75mm
 - Waste Detail
 - Front to back fall to waste slot