


Base HPL

Designed for lighter-use washrooms in commercial and industrial spaces.



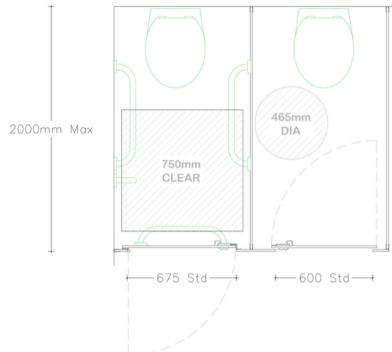

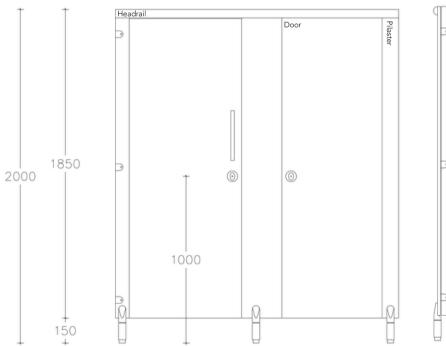



Call: 01692 774920 | Email: info@cube-install.com

Belmore Place, 6 Bunkell Road, Rackheath Ind Estate, Norwich, NR13 6PX www.cube-install.com

Registered in England No. 10501718





DIMENSIONS

Max Overall Height

- 2000mm

Max Depth

- 1500mm

Floor Clearance

- 150mm

TECHNICAL DETAILS

Door Panel

Material

- High Pressure Laminate

Edge Treatment

- 2mm thick bounded ABS lipping

Thickness

- 18mm

Standard Dimensions

- Inward Opening H 1850mm x W 650mm, 25mm overlap with pilaster either side.

- Outward Opening H 1850mm x W 700mm, 25mm overlap with pilaster either side

- Size to suit site requirements and relevant building regulations

Components

- Indicator Face Plate

- Indicator Slide Bolt

- Coat Hook

- Self Closing Hinges

Pilaster Panel

Material

- High Pressure Laminate

Edge Treatment

- 2mm thick bounded ABS lipping

Thickness

- 18mm

Standard Dimensions

- H 1850mm x W - varies to suit site dimensions

Components

- Pedestal

- Indicator Slide Bolt Keep

- Headrail

- Fixing Cleat

TECHNICAL DETAILS

Divisions

Material

- High Pressure Laminate

Edge Treatment

- 2mm thick bounded ABS lipping

Thickness

- 18mm

Standard Dimensions

- H 1850mm x W 1500mm - varies to suit site dimensions. Dimensions

from back of cubicle to front

Components

- Fixing Cleat

Hardware

Indicator Plate

- Satin Anodised Aluminium

- Emergency release facility

- Circular face plate

- Concealed fixings

- Red/White occupancy indicator

- Face Fixed

Indicator Bolt

- Satin Anodised Aluminium

- Easy slide action lock

- Integrated buffer

- Face Fixed

Keep

- Satin Anodised Aluminium

- Face Fixed

Hinge

- Satin Anodised Aluminium

- Self closing cams

- Breakout-resistant fixing sleeve

- Anti-finger trap

- Lift-off facility for emergency access

Cleat

- Satin Anodised Aluminium - D brackets

- Stainless Steel bolt-through fixings

Pedestal

- Satin Anodised Aluminium

- Adjustable height to accommodate uneven floors

- Giving 150mm floor clearance

- Solid rolled design

Headrail

- Satin Anodised Aluminium

- High strength D profile