
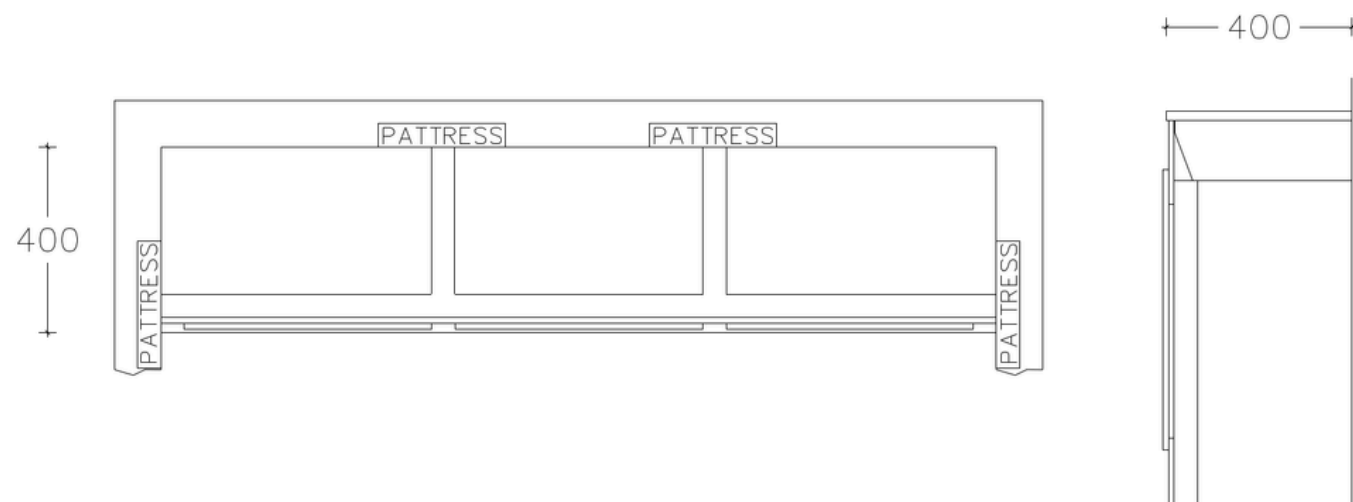


Stainless Steel Washtough (HPL Panels)

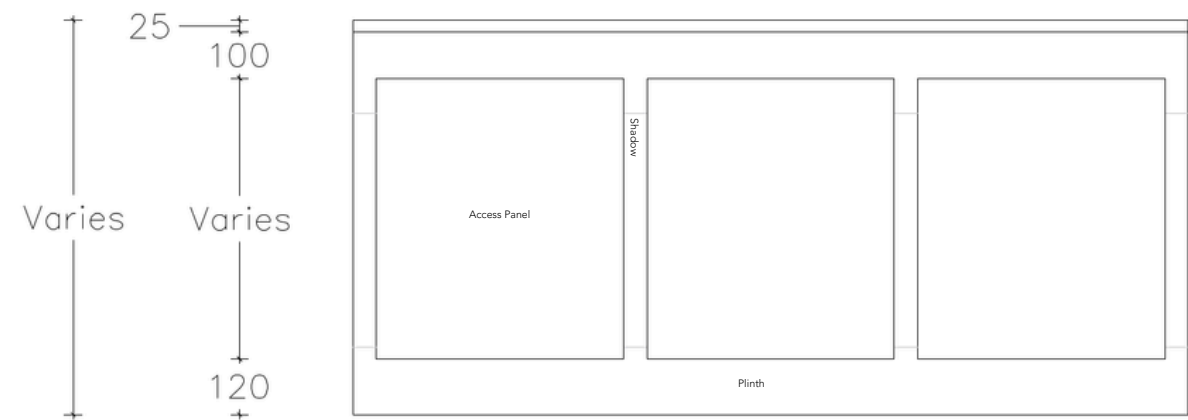

DIMENSIONS

- Standard Heights
 - 600mm - 900mm
- Standard Depths
 - 400mm

TECHNICAL DETAILS

Access Panel

- Material
 - High Pressure Laminate
- Edge Treatment
 - 2mm thick bonded ABS lipping
- Thickness
 - 18mm
- Component Types
 - Fixing clips with pull-out facility
 - Fixing clips with lift-off facility
 - Hinges for fixed position, openable access panels
 - Turn locks for hinged panels
 - Security fixings for clip fixed panels
- Dimensions
 - Width and Height to suit site dimensions and panel application

Shadow Panel

- Material
 - High Pressure Laminate
- Edge Treatment
 - Straight Cut
- Thickness
 - 18mm
- Components
 - High strength fixing into framework

TECHNICAL DETAILS

Plinth

- Material
 - High Pressure Laminate
- Edge Treatment
 - Straight Cut
- Thickness
 - 18mm
- Components
 - High strength fixing into framework

Framing

- Material
 - Soft wood for bespoke fitting to surroundings
- Components
 - Receiving pull-out clips
 - Receiving lift-off clips
 - High strength fixing into pattress or solid wall/floor
- Site Erected
 - To take covered flooring or fix on pre-installed floor
 - Top shadow to be minimum 50mm where lift off systems is being used

Top

- Material
 - Grade 304 Austenitic Stainless Steel
- Edge Treatment
 - Welded
- Downstand
 - 25mm
- Upstand
 - 40mm
- Waste Detail
 - Gradual fall to central waste hole