

SGL Vanity (HPL Panels)



+ − Varies →

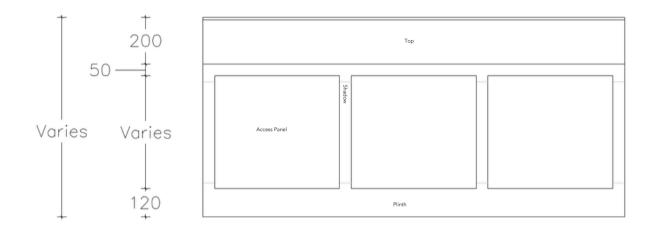

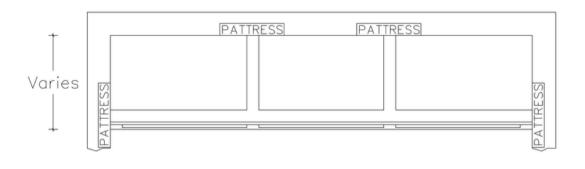

Call: 01692 774920 | Email: info@cube-install.com Cube Install Limited Belmore Place, 6 Bunkell Road, Rackheath Ind Estate, Norwich, NR13 6PX www.cube-install.com Registered in England No. 10501718



DIMENSIONS

Standard Heights - 600mm - 900mm Standard Depths - Semi Recessed - 350mm - Fully Recessed - 600mm

TECHNICAL DETAILS

Access Panel

- Material
- High Pressure Laminate
- Edge Treatment
- Žmm thick bonded ABS lipping
- Thickness - 20mm
- Component Types
- Fixing clips with pull-out facility
- Fixing clips with pull-out facility
- Hinges for fixed position, openable access panels
- Turn locks for hinged panels
- Security fixings for clip fixed panels Dimensions
- Width and Height to suit site dimensions and panel application

Shadow Panel

- Material
- High Pressure Laminate
- Edge Treatment - Straight Cut
- Straight
- Thickness - 20mm
- Components
- High strength fixing into framework

TECHNICAL DETAILS

Plinth

- Material
- Solid Grade Laminate
- Edge Treatment
- Straight Cut
- Thickness
- 20mm
- Components
- High strength fixing into framework

Framing

- Material
- Soft wood for bespoke fitting to surroundings
- Components
- Receiving pull-out clips
- Receiving lift-off clips
- High strength fixing into pattress or solid wall/floor
- Site Erected
- To take covered flooring or fix on pre-installed floor
- Top shadow to be minimum 50mm where lift off systems is being used
- Тор
- Material
- Solid Grade Laminate
- Edge Treatment
- Butt jointed with polished and
- raidused finish
- Downstand
- Up to 200mm
- Upstand
- Up to 200mm